


# SHF 340

Schneiden

WEZAG

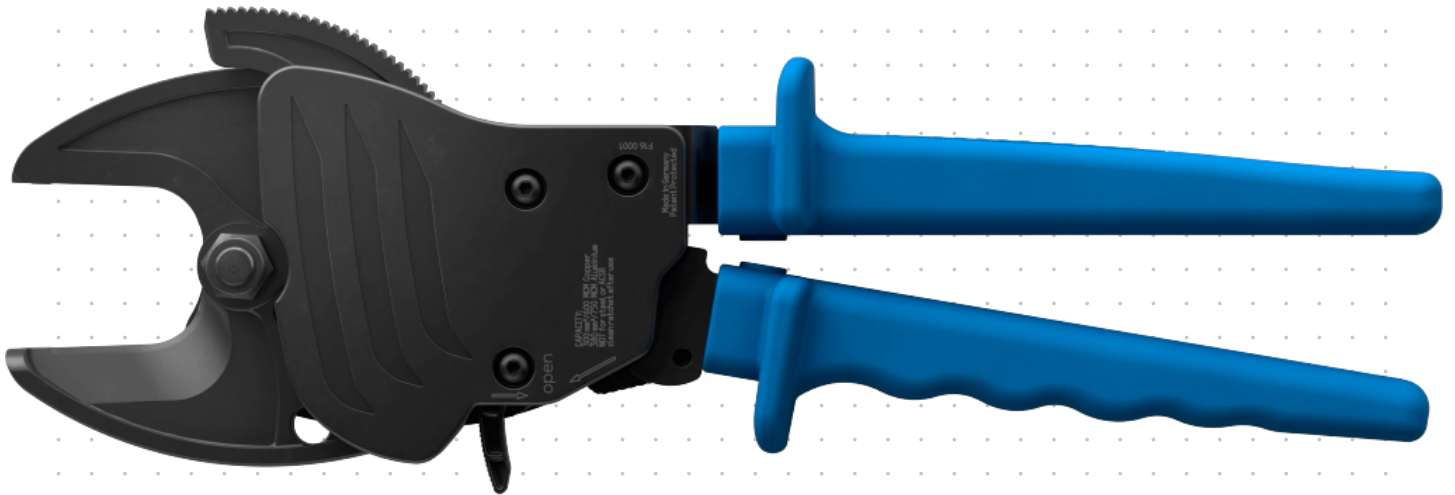

## Features

### This tool is made for these applications

Cable up to max. Ø 34 mm from conductor class 1 & 2 in accordance with DIN EN 60228 | VDE 0295 | IEC 60228

### That is particularly

With open claws - can also be used in limited spaces.

Cuts cables in a clean and smooth way. You are always perfectly prepared for the next processing step.

Handles even heavy jobs with ease, thanks to optimum transmission ratios.

The low weight and compact size make it easy for you to work.

### These functions make cutting more convenient

The cable cutter can be easily operated with just one hand.

Tool lies comfortably in the hand thanks to soft handles with anti-slip protection.

Can be released in any cutting position in the event of incorrect operation.

### Further advantages offered by our Made in Germany standard

Tool is extremely robust, minimal wear.

Blades can be easily replaced if necessary.

Manufactured from special steel, specially hardened and tempered parts - quality that lasts.

## Technical Data

### Cutting range

CU cable

Diameter 34 mm | 1 1/4"

Cross-section max. 300 mm<sup>2</sup>

AL cable

Diameter 34 mm | 1 1/4"

Cross-section max. 380 mm<sup>2</sup>

### Conductor classes

Class 1 | solid conductors

Class 2 | stranded conductors

DIN EN 60228 | VDE 0295 | IEC 60228

### Dimensions (length x width)

approx. 295 mm x 100 mm

### Weight

approx. 820 g

## Versions

### SH

various versions for burr-free cutting of copper (CU) & aluminium (AL), also available with ACSR or with 1000 Volt insulation